


How to configure motion detection recording in 96NI-ST series NVR


Step 1: Click **Menu**> **Camera**




Step 2: Input **IP address**, **admin** and **password** of IP camera to add it.

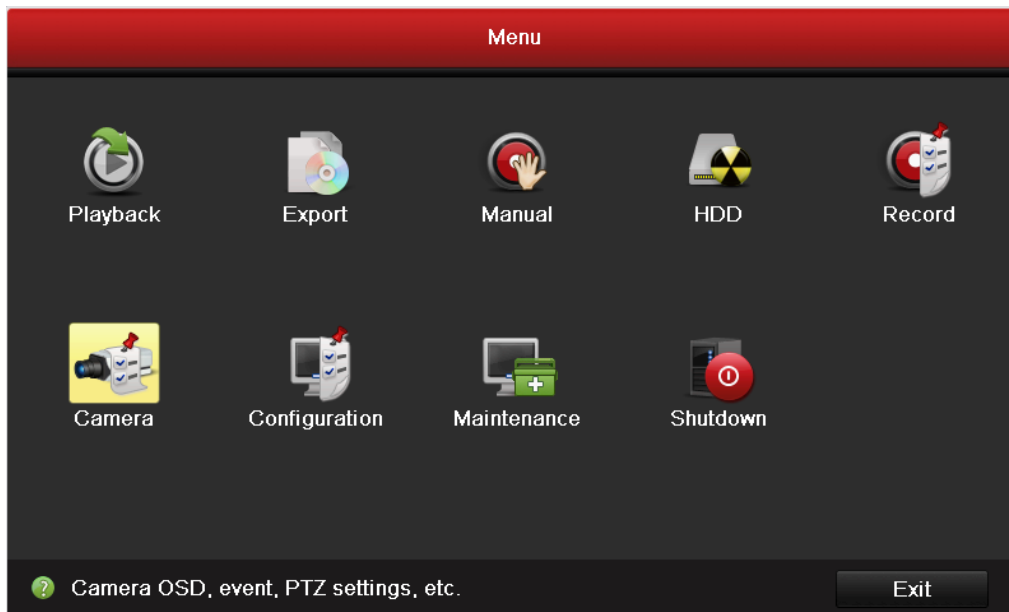

Step 3: Click **Menu> Camera>Motion**. Select camera, enable **Motion detection**, configure the **Sensitivity** and then click **Full Screen**. (After this configuration you can click **Copy** to copy it to other cameras.)

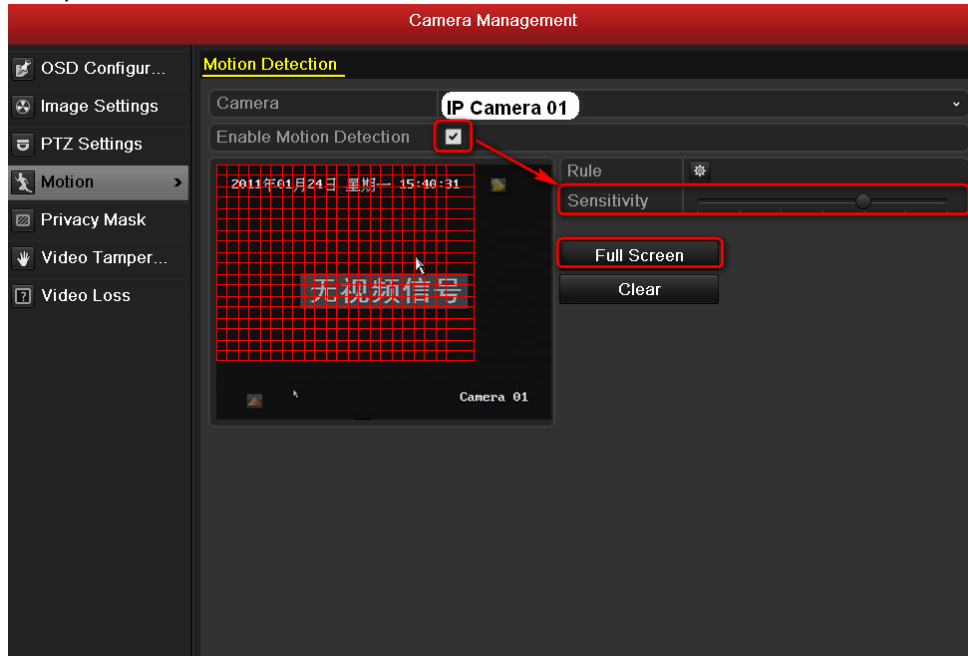

Step 4: Click **Rule** to check that **Schedule** and **Triggering channel** are all right. (After this configuration you can click **Copy** to copy it to other cameras.)

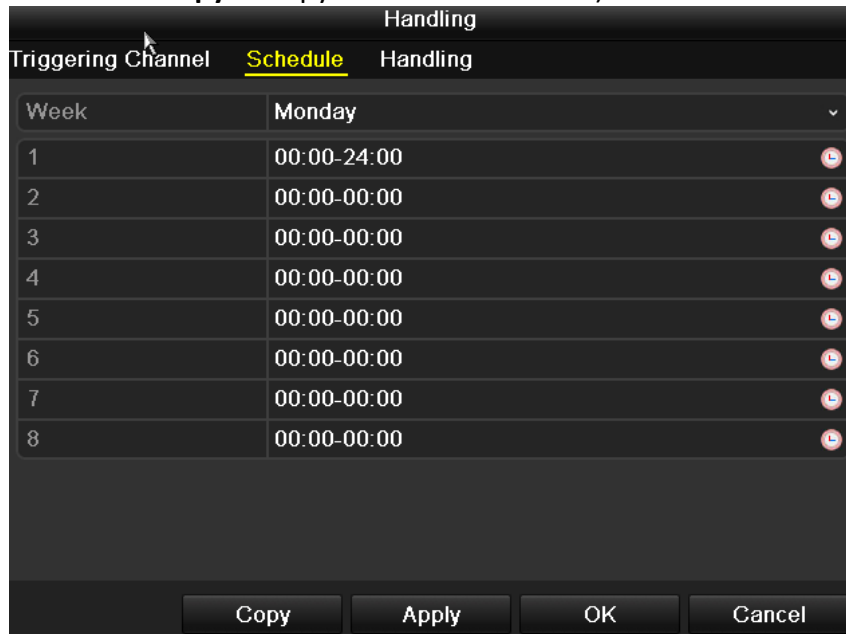


Step 5: Click **Menu> Camera> Record>Encoding parameters**, select a camera and then configure **Main stream (Normal)** and **Main stream (Event)** to same parameters. (Please kindly make sure that all parameters of normal and event are same for each camera.)

| | | |
|----------------------------|-------------------------------------|--------------------|
| Camera | IP Camera 3 | |
| Encoding Parameters | Main Stream(Normal) | Main Stream(Event) |
| Stream Type | Video & Audio | Video & Audio |
| Resolution | 704*576(4CIF) | 704*576(4CIF) |
| Bitrate Type | Variable | Variable |
| Video Quality | Medium | Medium |
| Frame Rate | 25fps | 25fps |
| Max. Bitrate Mode | General | General |
| Max. Bitrate(Kbps) | 2048 | 2048 |
| Max. Bitrate Range Reco... | 1344~2240(Kbps) | 1344~2240(Kbps) |
| Pre-record | 5s | |
| Post-record | 5s | |
| Expired Time (day) | 0 | |
| Redundant Record/Capture | <input type="checkbox"/> | |
| Record Audio | <input checked="" type="checkbox"/> | |

Step 6: Click **Menu> Camera> Record>Record Schedule**. Select camera, enable **Record Schedule** and then click **Edit**.

The screenshot shows the 'Record' configuration window with the 'Record Schedule' tab selected. The camera is set to 'IP camera 01'. The 'Enable Record Schedule' checkbox is checked. A grid below shows recording times for days of the week (Mon-Sun) and hours (0-24). An 'Edit' button is highlighted with a red box and an arrow. A legend on the right shows recording modes: Normal (blue), Motion (green), Alarm (red), Motion|Alarm (orange), and Motion&Alarr (light blue).

Step 7: Enable **All day**, select **Motion** and then copy it to all week. Apply the change.

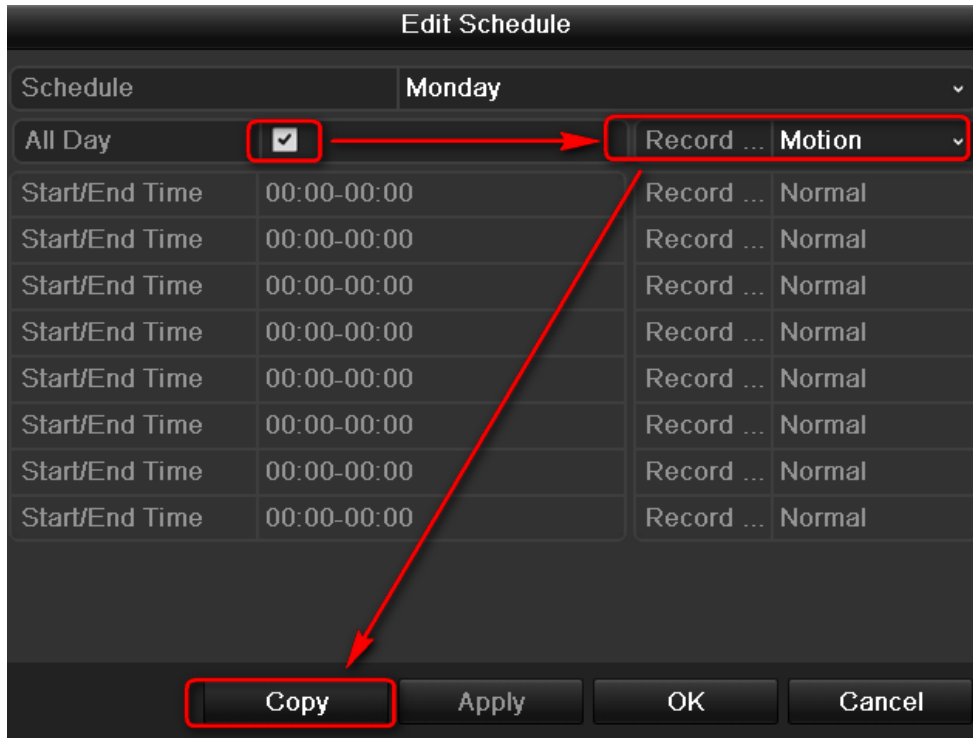

First Choice for Security Professionals
Hikvision Technical Support