

## DS-PWA32-H(R)(S)(G)

### AX Series Wireless Security Control Panel

AX series wireless security control panel, containing 32 wireless zones, supports Wi-Fi, LAN, GPRS, and 3G/4G communication methods, as well as ISAPI, and SIA-Contact ID protocol. It is applicable to the scenarios of market, store, house, factory, warehouse, office, etc.



### Available Model

- DS-PWA32-H (Black/White)
- DS-PWA32-HS (Black/White): supports 3G/4G
- DS-PWA32-HR (Black/White): supports IC Card
- DS-PWA32-HSR (Black/White): supports 3G/4G and IC Card
- DS-PWA32-HG (Black/White): supports GPRS
- DS-PWA32-HGR (Black/White): supports GPRS and IC Card


### Features

- Supports dual path communication of alarm events and other signals over LAN, Wi-Fi, GPRS and 3G/4G utilising a main and backup channel
- Supports up to 32 wireless inputs, 32 wireless outputs, 8 keyfobs and 2 sirens
- IVaas (Intruder Verification As A Service) :Support up to 2 channel 7 seconds pre/post alarm recording for Video Verificaiton (Hikvision IP camera/3rd party IP camera support ONVIF)
- Supports viewing event video via mobile client and email
- Supports doorbell function: The detector rings like a doorbell when it is triggered in disarming status
- Voice prompt for configuration and operation
- Configuration via web client, mobile client, or client software
- Pushes alarm notification via messages, phone calls, and email
- SIA-Contact ID protocol compatible
- Long distance two-way communication (800m in open area)



- AES-128-bit data encryption
- Supports LED indicator to indicates system status
- 4520 mAh lithium backup battery, supports up to 12h power supply

## Typical Application

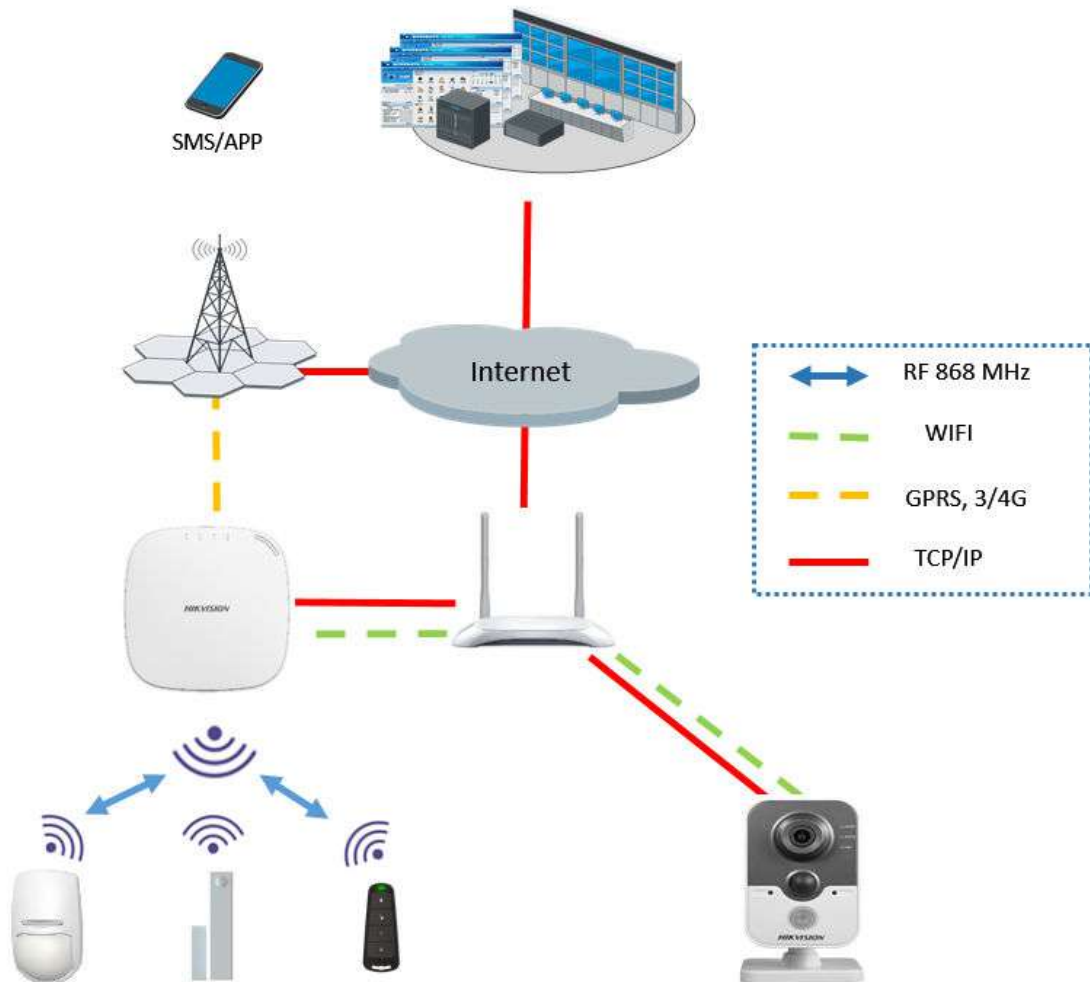

DS-PW32-H(R)(S)(G)		
Wireless Device Connection	Alarm Input	32
	Alarm Output	32
	Siren	2
	Keyfob	8
	Partition	1
Interaction	Audio Output	1, 1.5W
RF	RF Frequency	868MHz
	RF Modulation	2GFSK
	RF Distance	800m (Open Area)
Wired Network	Ethernet	10M/100M Self-adaptive
Cellular Network	GPRS, 3/4G	Supports reporting push-notification to ARC & Cloud, text notification via SMS, and audio notification via phone call
Wi-Fi	Standard	802.11b/g/n
	Encryption	Supported
	Channel	2.4 G
Application & Protocol	Application	iVMS-4200, and mobile APP
	Protocol	SIA - Contact ID
User	IC Card	12
	User	13 (1 installer, 1 administrator, and 11 general user)
Others	Power	5 VDC, 10 W
	Consumption (without HDD)	< 5.6 W
	Operation Temperature	-10 °C to 55 °C
	Operation Humidity	10% to 90%
	Shell Material	PC+ABS
	Dimension(WxHxD)	155 × 155 × 35mm

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216)521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-(0)31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com